

Comfort Controller 1600 (Outdoor Duty Rated)

The Comfort Controller 1600 is a microcontroller-based module that provides general purpose HVAC control and monitoring capability in a stand-alone or network environment using closed-loop, direct digital control. The 1600 gives the Carrier Comfort Network (CCN) the capability to control and communicate with non-Carrier equipment and Carrier HVAC equipment not equipped with Product Integrated Controls (PIC) controls.


You can connect 16 field points (8 inputs and 8 outputs) to this controller.

FEATURES

- Stand-alone control and monitoring of up to 16 field points, using proven algorithms.
- Compatibility with all standard CCN user interfaces.
- Two LEDs, conveniently located on the front of the module, indicate processor status (red), and CCN Communication Bus status (yellow).
- Entire database at your disposal. Based on your application's requirements, you determine how many and which algorithms, inputs/outputs, schedules, alarms, and system functions to include in the database. Therefore, the database will only consist of the items that are necessary for the application — valuable memory space is not wasted.
- Ability to display the amount of available database space.
- Ability to add items to database as necessary.
- Local connection for LID and CCN.
- Total facilities management when linked to a CCN.
- Two-day backup of clock and data such as Data Collection and Runtime.
- No need for batteries.

FUNCTIONS

Cooling and Heating Control
 Space Temperature Comfort Zone
 Humidification and Dehumidification
 Mixed Air Damper Optimization
 VAV Fan Control
 VAV Supply and Return Fan Tracking
 Indoor Air Quality
 Generic PID Control
 Time Scheduling with/without Override

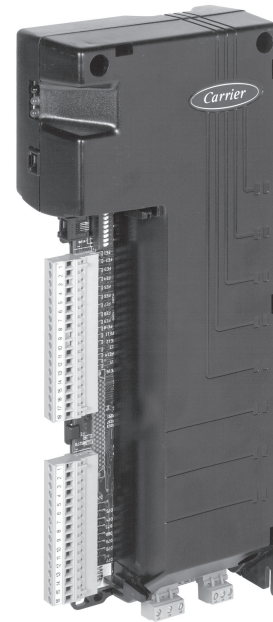

8 INPUTS	
Numbers	Specifications
1 to 4	Discrete or analog (0-10 Vdc)
5 & 6	Temperature
7 & 8	Discrete, analog, or temperature
	Discrete
	Dry contact
	Pulsed dry contact
	Analog
	4-20 mA
	0-10 Vdc
	Temperature
	5K & 10K ohm thermistors
	1K ohm nickel RTD
8 OUTPUTS	
Numbers	Specifications
1 to 4	Discrete
5 & 6	Analog
7 & 8	Discrete or analog
	Discrete
	24 Vdc@80 mA
	Analog
	4-20 mA
	0-11 Vdc (varies with point type)

Analog Temperature Control
 Discrete Interlock
 Staged Thermostat
 Proportional Thermostat
 Primary/Secondary Pump Control
 Staged Discrete Control
 Permissive Interlock
 Night Time Free Cooling
 Morning Warm-up
 Adaptive Optimal Start/Stop
 Control Point Reset

On-Board Consumable Point
 Calculates a usage value (kwh, gal/hr, lbs/hr, etc.) in applications where simple data collection is required.

On-Board Trending
 Collects up to 60 data samples per point (with an adjustable iteration rate) on a revolving basis, or stops the trending after 60 samples are collected. Use as a means of troubleshooting.

Linkage to Airside (TSM) and Waterside (WSM) Systems

Optimizes efficiency by fully integrating all HVAC operations (DAV).

Custom Programming (BEST⁺⁺)
 Enhances or supplements the industry-proven, pre-engineered algorithms with BEST⁺⁺ by creating new algorithms to meet any unique control requirements.

CCN FEATURES

When included in a network with other CCN controllers, Option Modules, and user interfaces, the following additional capabilities are possible:

- Alarm processing, messages, and annunciation.
- Runtime, history, and consumable data collection and report generation.
- Demand limiting/loadshedding.
- Broadcast of data such as outside air temperature, outside air humidity, and time of day.
- Data transfer between system elements.
- Timed overrides for use with Tenant Billing.
- Airside and waterside linkage.

ENCLOSURE AND POWER SUPPLY

The 1600 is designed so that it can be easily installed in a field-supplied NEMA-3R enclosure.

The 1600 uses any standard, Class II, SELV-compatible, field-supplied 24 Vac, 60 VA transformer.

SPECIFICATIONS

Power Requirements 60VA@24 Vac \pm 15%
 1.5A@33 Vdc \pm 15%
 Dimensions 13 in H x 2.75 in W x 5.5 in D
 (33 cm x 7 cm x 14 cm)
 Operating Temperature -40°F to 158°F
 (-40°C to 70°C)
 Storage Temperature -40°F to 185°F
 (-40°C to 85°C)
 Operating Humidity 0 to 90%, non-condensing

Discrete Out Specifications

Output Signal 24 Vdc@80 mA current limited

Analog Out Specifications

4-20 mA Milliamp Type
 Load Resistance 0-600 ohms
 Resolution 0.085 mA
 Accuracy \pm 2%
 0-11 Vdc Voltage Type (varies with point type)
 Load Resistance >50,000 ohms
 Resolution 50 mV
 Accuracy \pm 2%

Discrete In Specifications

Dry Contacts Switch Closure
 Pulsing Dry Contacts
 Repetition Rate 5 Hz max.
 Minimum Pulse Width 100 msec

Analog In Specifications

4-20 mA Milliamp Type
 Wire type 2-wire
 Resolution 0.025 mA
 Accuracy \pm 1%
 0-10 Vdc Voltage Type
 Resolution 0.0125 V
 Accuracy \pm 1%
 5K Thermistor Type
 Nominal reading @ 5,000 ohms 77°F (25°C)
 Resolution 0.1°F
 Accuracy \pm 1°F
 10K Thermistor Type
 Nominal reading @ 10,000 ohms 77°F (25°C)
 Resolution 0.1°F
 Accuracy \pm 1°F
 Nickel RTD Type
 Nominal reading @ 1,000 ohms 70°F (21°C)
 Resolution 0.1°F
 Accuracy \pm 2°F

The 1600 is UL 916 PAZX, VDE, ULC, and CE Mark listed.